


NOTES:

1. BUTYL SEALANT MUST CREATE A PERMANENT AIR SEAL.
4. DO NOT WRAP TERMINATION BAR AROUND CORNERS.
5. FASTENERS OF TERMINATION BAR MUST PROVIDE CONSTANT COMPRESSION ON SEALANT.
6. ALLOW 1/4" TO 1/2" SPACING BETWEEN CONSECUTIVE LENGTHS OF TERMINATION BAR.

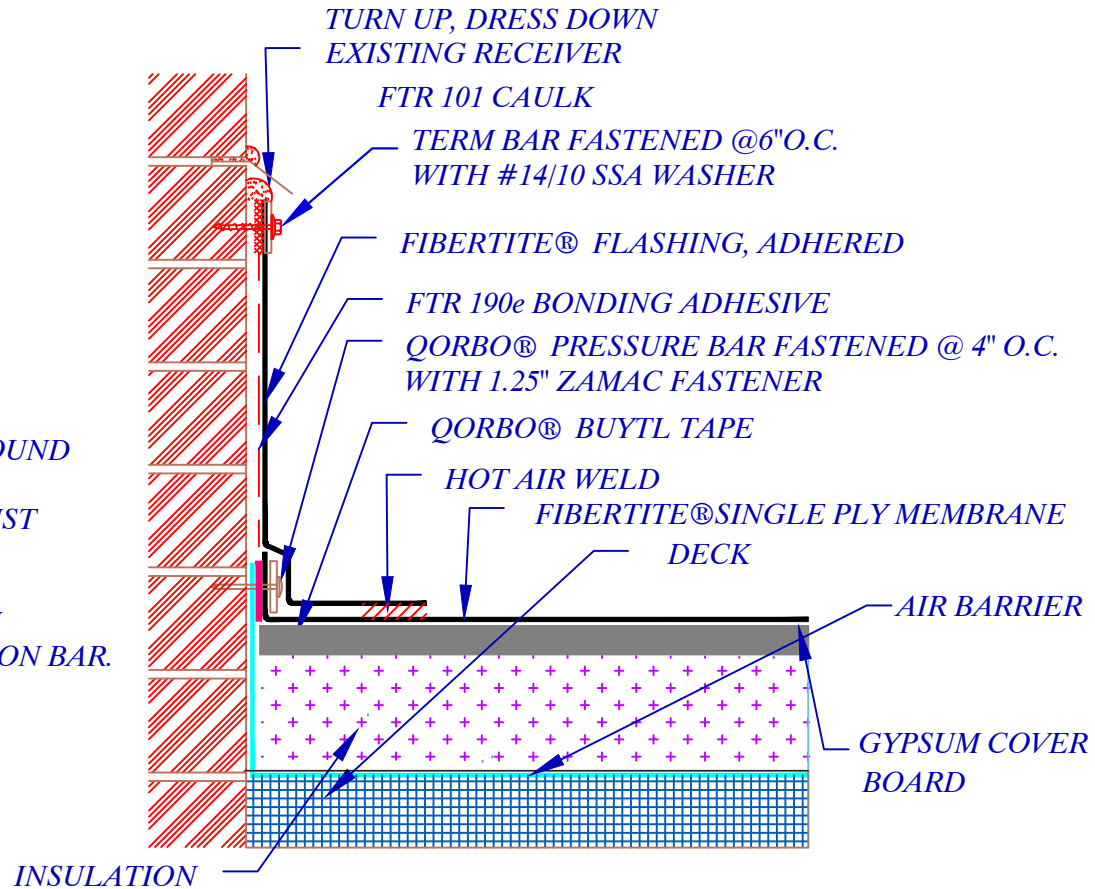

MEMBRANE
SUBSTRATE

AIR SEALED

CONSTRUCTION
TYPE

REROOF

PER FIBERTITE®
SCOPE OF WORK

6-20-2020

TYPICAL WALL FLASHING DETAIL

SCALE

NTS

REVISION

ALL PREVIOUS

DATE

6-20-2020